

# SANI-LAV<sup>®</sup> COLUMBIA PRODUCTS

## Mid-Sized Industrial Nozzles with Brass Body Model N1 Series



Model N1



Model N1B



Model N1W



Model N1R



Model N1Y

Also available with aluminum and stainless steel main bodies.  
Models N1A and N1SS

N1 Series Universal Features


- Heavy-duty brass body and brass and stainless-steel components
- Insulated rubber cover with yellow arrow directions
- Safety shut off trigger when released
- 3/4" GHT inlet allows direct hose connection
- Swivel Adapter N17 (sold separately)
- Replacement parts available
- Maximum operating temperature: 200°F/93°C
- Maximum working pressure 150 psi
- Weight 1.0 lb.
- Dimensions: L 5.22" x H 5.24" x W 1.81"


Models

Color	Standard
Safety Orange	N1
Black	N1B
White	N1W
Red	N1R
Yellow	N1Y

Quick Specs

Max Temperature	200°F/93°C
Max Pressure	150 psi
Inlet	3/4" Female GHT
Tip	Not Threaded
Body Material	Brass
Handle Type	Stainless Steel
Weight	1.0 lb.
Hose Adapter	Model N17 (Sold Separately)
Dimensions	L 5.22" x H 5.24" x W 1.81"

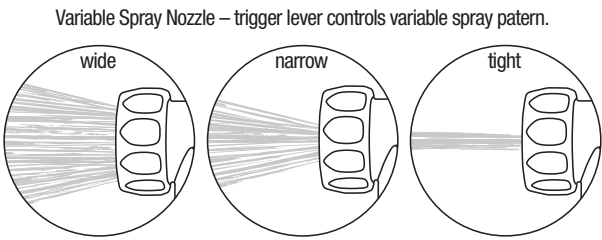


**WARNING:** This product can expose you to chemicals including Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

N1 Replacement Parts

Description	Part Number
Orange Insolated Cover	A N1OC
Black Insolated Cover	B N1BC
White Insolated Cover	C N1WC
Red Insolated Cover	D N1RC
Yellow Insolated Cover	E N1YC
Brass Main Body	F N1MB
Handle Replacement Kit	G N1HR
Barrel Cartridge Replacement Kit	H N1BR
Bolt Sleeve	I N1E
Locking Nut	J N1F

Replacement Covers

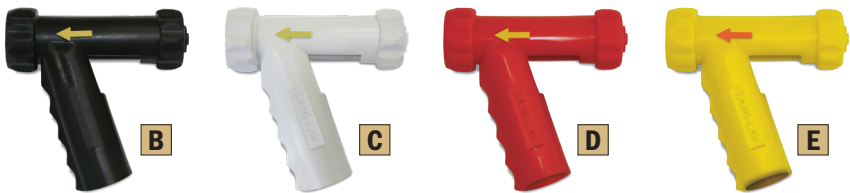

A Replacement Cover



F Body




I Bolt Sleeve



J Locking Nut



G Handle Replacement Kit  
Stainless steel handle  
Stainless steel nut  
Nylon bushing  
Stainless steel bolt

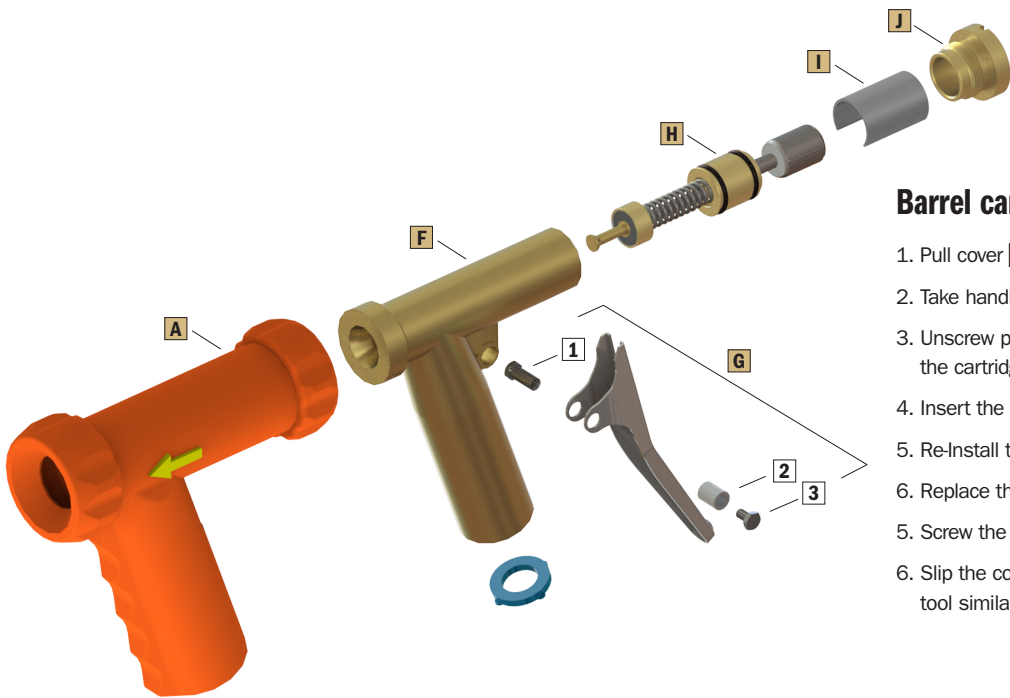

Barrel cartridge replacement kit Instructions

1. Pull cover **A** over the back of nozzle to expose the back end.
2. Take handle off nozzle by removing parts **1**, **2**, and **3**.
3. Unscrew part **J** locking nut and remove bolt sleeve **I** and the cartridge **H**.
4. Insert the new cartridge.
5. Re-Install the handle.
6. Replace the sleeve with the open end facing down.
5. Screw the locking nut back into place.
6. Slip the cover back over the nozzle end using a round ended tool similar to a shoe horn.