

SANI-LAV[®] COLUMBIA PRODUCTS

Mid-Sized Industrial Nozzles with Brass Body Model N1 Series



Model N1



Model N1B



Model N1W



Model N1R



Model N1Y

Also available with aluminum and stainless steel main bodies.
Models N1A and N1SS

N1 Series Universal Features

Model	Color	Inlet	Material	Max PSI	Max Temp.	GPM @ 100 PSI	Weight	Includes
N1	Safety Orange	3/4" GHT	Brass, EPDM Cover	150	200°F/93°C	4.8	1.0 lbs.	—
N1B	Black	3/4" GHT	Brass, EPDM Cover	150	200°F/93°C	4.8	1.0 lbs.	—
N1W	White	3/4" GHT	Brass, EPDM Cover	150	200°F/93°C	4.8	1.0 lbs.	—
N1Y	Yellow	3/4" GHT	Brass, EPDM Cover	150	200°F/93°C	4.8	1.0 lbs.	—
N1R	Red	3/4" GHT	Brass, EPDM Cover	150	200°F/93°C	4.8	1.0 lbs.	—

Quick Specs


Max Temperature	200°F/93°C
Max Pressure	150 psi
Inlet	3/4" Female GHT allows direct hose connection
Tip	Not Threaded
Body Material	Brass
Components	Brass and stainless steel
Cover Material	Insulated rubber with yellow arrow directions
Handle Type	Stainless steel
Trigger	Safety shut off when released
Hose Adapter	Model N17 (Sold Separately)
Weight	1.0 lbs.
Dimensions	L 5.22" x H 5.24" x W 1.81"

Water Flow Rates

PSI	Standard GPM
20	2.0
30	2.5
40	2.9
50	3.3
60	3.7
70	3.9
80	4.3
90	4.5
100	4.8
110	5.0
120	5.3
130	5.5
140	5.7
150	6.0



Variable Spray Nozzle – trigger lever controls variable spray pattern.

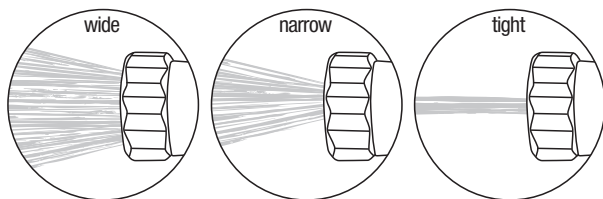


Notice for California Consumers
WARNING: This product can expose you to chemicals including Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

N1 Replacement Parts

Description	Part Number
Orange Insolated Cover	A N1OC
Black Insolated Cover	B N1BC
White Insolated Cover	C N1WC
Red Insolated Cover	D N1RC
Yellow Insolated Cover	E N1YC
Brass Main Body	F N1MB
Handle Replacement Kit	G N1HR
Barrel Cartridge Replacement Kit	H N1BR
Bolt Sleeve	I N1E
Locking Nut	J N1F


Replacement Covers

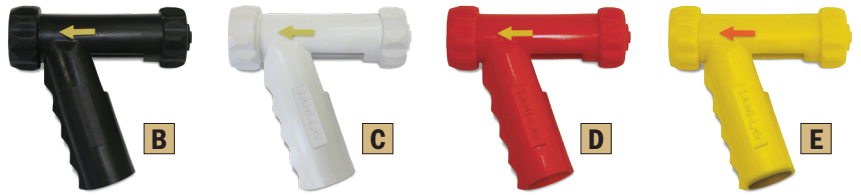

A Replacement Cover



F Body

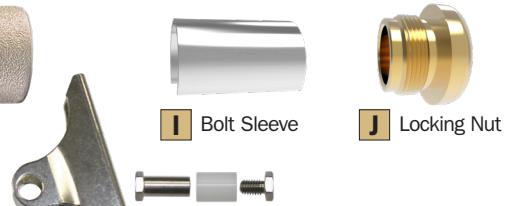


I Bolt Sleeve

J Locking Nut



G Handle Replacement Kit
Stainless steel handle
Stainless steel nut
Nylon bushing
Stainless steel bolt

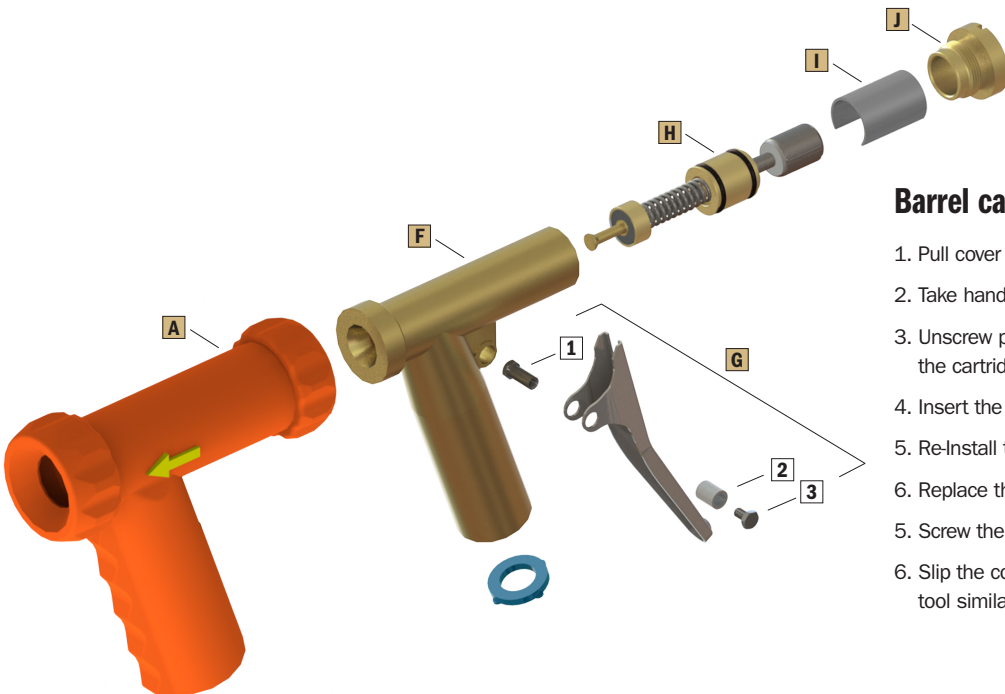

Barrel cartridge replacement kit Instructions

1. Pull cover **A** over the back of nozzle to expose the back end.
2. Take handle off nozzle by removing parts **1**, **2**, and **3**.
3. Unscrew part **J** locking nut and remove bolt sleeve **I** and the cartridge **H**.
4. Insert the new cartridge.
5. Re-Install the handle.
6. Replace the sleeve with the open end facing down.
5. Screw the locking nut back into place.
6. Slip the cover back over the nozzle end using a round ended tool similar to a shoe horn.