

SANI-LAV[®] COLUMBIA PRODUCTS

Mid-Sized Industrial Nozzles with Aluminum Body N1A Series



Model N1A
Model N1AX

Model N1AB
Model N1ABX


Model N1AW
Model N1AWX



Model N1AR
Model N1ARX

Model N1AY
Model N1AYX

Also available with brass and stainless steel main bodies.
Models N1 and N1SS



N1A Series Universal Features

- Heavy-duty aluminum body with brass and stainless steel components
- Insulated rubber cover with yellow arrow directions
- Safety shut off trigger when released
- 3/4" GHT inlet allows direct hose connection
- Swivel Adapter N17 (sold separately)
- Replacement parts available
- Maximum operating temperature: 200°F/93°C
- Maximum working pressure 150 psi
- Weight 1.0 lb.
- Dimensions: L 5.22" x H 5.24" x W 1.81"

Models


Color	Standard	Low-Flow
Safety Orange	N1A	N1AX
Black	N1AB	N1ABX
Red	N1AR	N1ARX
White	N1AW	N1AWX
Yellow	N1AY	N1AYX

Quick Specs

Max Temperature	200°F/93°C
Max Pressure	150 psi
Inlet	3/4" Female GHT
Tip	Not Threaded
Body Material	Aluminum
Handle Type	Stainless Steel
Weight	1.0 lb.
Hose Adapter	Model N17S (Sold Separately)
Dimensions	L 5.22" x H 5.24" x W 1.81"



Variable Spray Nozzle – trigger lever controls variable spray pattern.

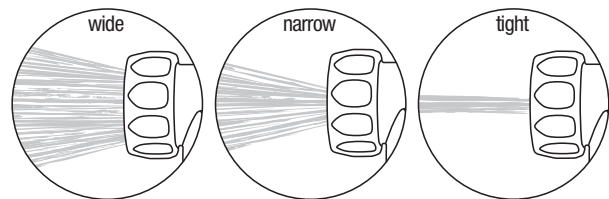

Water Flow Rate Comparison

PSI	Standard GPM	Low-Flow GPM	Water Saving
30	2.6	2.2	17.39%
40	3.1	2.4	22.22%
50	3.5	2.8	20.00%
60	3.7	3.0	18.75%
70	4.1	3.1	25.00%
80	4.3	3.5	18.92%
90	4.6	3.7	20.00%
100	4.7	4.0	14.63%


Notice for California Consumers

WARNING: This product can expose you to chemicals including Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

NA1 Replacement Parts

Description	Part Number
Orange Insolated Cover	A N1OC
Black Insolated Cover	B N1BC
White Insolated Cover	C N1WC
Red Insolated Cover	D N1RC
Yellow Insolated Cover	E N1YC
Aluminum Main Body	F N1AMB
Handle Replacement Kit	G N1HR
Barrel Cartridge Replacement Kit	H N1BR
Barrel Cartridge Replacement Kit	I N1BRX
Bolt Sleeve	J N1E
Locking Nut	K N1F

Replacement Covers

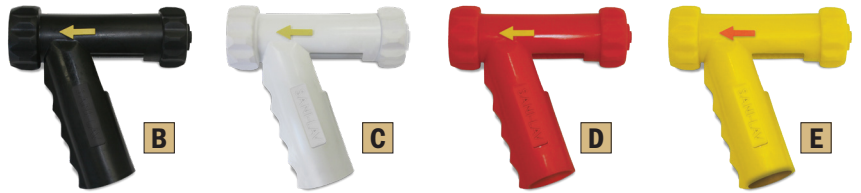

A Replacement Cover




F Body



J Bolt Sleeve

K Locking Nut

G Handle Replacement Kit
Stainless steel handle
Stainless steel nut
Nylon bushing
Stainless steel bolt

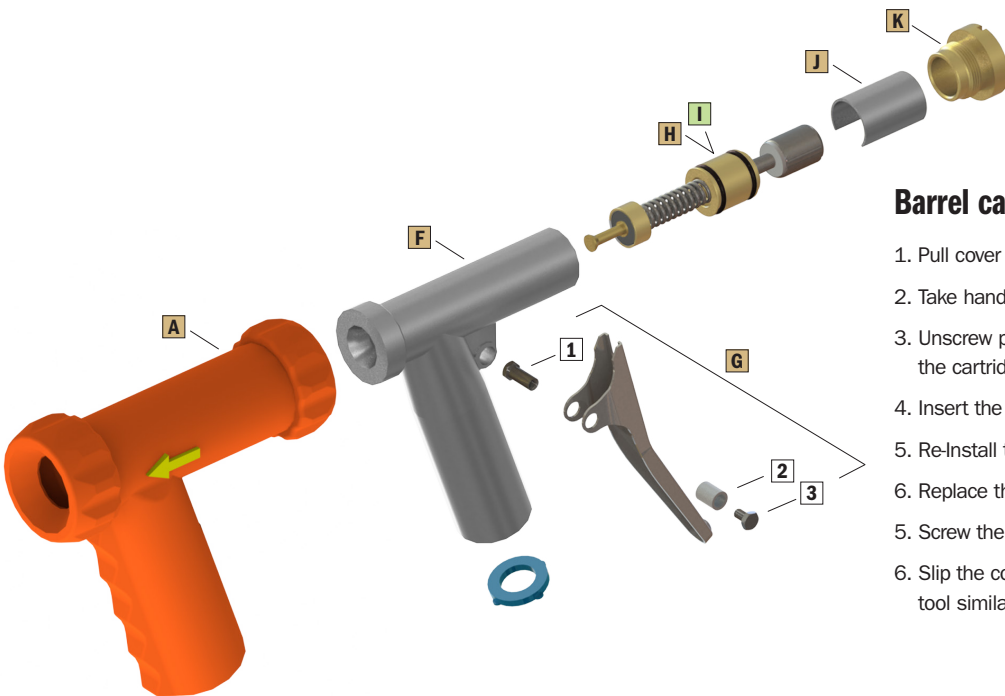

Barrel cartridge replacement kit Instructions

1. Pull cover **A** over the back of nozzle to expose the back end.
2. Take handle off nozzle by removing parts **1**, **2**, and **3**.
3. Unscrew part **K** locking nut and remove bolt sleeve **J** and the cartridge **H** or **I**.
4. Insert the new cartridge.
5. Re-Install the handle.
6. Replace the sleeve with the open end facing down.
5. Screw the locking nut back into place.
6. Slip the cover back over the nozzle end using a round ended tool similar to a shoe horn.