

SANI-LAV[®] COLUMBIA PRODUCTS

Small-Sized Industrial Nozzles with Zinc Body and Temperature Resistant Plastic Handle N2 Series



Model N2
Model N2X



Model N2B
Model N2BX



Model N2W
Model N2WX



Model N2R
Model N2RX



Model N2Y
Model N2YX



Model N2BL
Model N2BLX



Model N2G
Model N2GX



N2 Series Universal Features

- Heavy-duty zinc body with brass and stainless steel components
- Insulated rubber cover
- Hardened temperature resistant Santoprene™ handle
- Safety shut off trigger when released
- 3/4" GHT inlet allows direct hose connection
- Threaded 3/4" Male GHT tip
- Maximum working pressure 100 psi
- Maximum operating temperature: 150°F/65°C
- Weight 0.5 lbs.
- Dimensions: L 5.48" x H 5.13" x W 1.29"

Models


Color	Standard	Low-Flow
Safety Orange	N2	N2X
Black	N2B	N2BX
White	N2W	N2WX
Red	N2R	N2RX
Yellow	N2Y	N2YX
Blue	N2BL	N2BLX
Green	N2G	N2GX

Quick Specs

Max Temperature	150°F/65°C
Max Pressure	100 psi
Inlet	3/4" Female GHT
Tip	Threaded 3/4" Male GHT
Body Material	Zinc
Handle Type	Hardened Temperature Resistant Plastic
Weight	0.5 lbs.
Hose Adapter	Model N17 (Sold Separately)
Dimensions	L 5.48" x H 5.13" x W 1.29"


Water Flow Rate Comparison

PSI	Standard GPM	Low-Flow GPM	Water Saving
30	5.0	3.6	28.00%
40	5.6	4.2	25.00%
50	6.1	4.7	22.95%
60	6.4	5.0	21.88%
70	7.2	5.5	23.61%
80	7.5	5.9	21.33%
90	7.9	6.1	22.78%
100	8.0	6.5	18.75%



N17 Swivel Hose Adapter (sold separately)

Variable Spray Nozzle – trigger lever controls variable spray pattern.

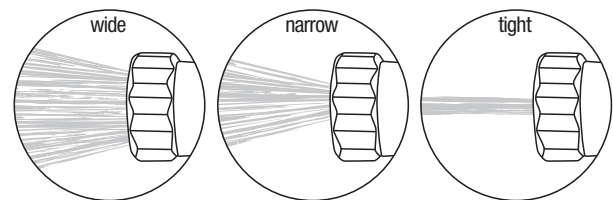

Notice for California Consumers
WARNING: This product can expose you to chemicals including Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.