

Complete Washdown Nozzle and Hose Bundle

Durable EPDM hose paired with an ergonomic high-performance spray nozzle.



The Sani-Lav hose bundle combines a high-performance ergonomic spray nozzle with a heavy-duty EPDM washdown hose. Built for food processing and industrial sanitation environments, the system provides durability, corrosion resistance, and operator comfort during extended cleaning operations.

Why choose the nozzle and hose bundle

- Complete washdown system – combination nozzle and hose
- Heavy-duty EPDM hose with stainless steel fittings
- Ergonomic spray nozzle with instant shut-off trigger
- Variable spray pattern for efficient cleaning
- Designed for food processing, sanitation, and industrial facilities

Ergonomic Series Nozzles

Universal Features

Model	Nozzle Color	Hose Color	Hose Length	Max Nozzle PSI	Max Hose PSI	Max Nozzle Temp	Max Hose Temp
H253NP1	Safety Orange	Safety Orange	25'	150	300	200°F/93°C	-40° to 200°F/93°C
H253NP1B	Black	Safety Orange	25'	150	300	200°F/93°C	-40° to 200°F/93°C
H25W3NP1	Safety Orange	White	25'	150	300	200°F/93°C	-40° to 200°F/93°C
H25W3NP1B	Black	White	25'	150	300	200°F/93°C	-40° to 200°F/93°C
H503NP1	Safety Orange	Safety Orange	50'	150	300	200°F/93°C	-40° to 200°F/93°C
H503NP1B	Black	Safety Orange	50'	150	300	200°F/93°C	-40° to 200°F/93°C
H503WNP1	Safety Orange	White	50'	150	300	200°F/93°C	-40° to 200°F/93°C
H50W3NP1B	Black	White	50'	150	300	200°F/93°C	-40° to 200°F/93°C

Water Flow Rate

PSI	Standard GPM
20	3.2
30	4.1
40	4.8
50	5.4
60	6.0
70	6.4
80	7.1
90	7.4
100	7.9
110	8.2
120	8.6
130	9.0
140	9.3
150	9.9


Ergonomic Nozzle Universal Features

- Heavy-duty stainless steel body with stainless steel components
- Insulated cover with yellow arrow directions
- Safety shut off trigger when released
- 75" GHT inlet allows direct hose connection
- Replacement parts available
- Maximum operating temperature: 200°F/93°C
- Maximum working pressure 150 psi
- Weight 1.6 lbs.
- Dimensions: L 5.91" x H 6.97" x W 1.88"



Hose Universal Features

- Heavy-duty EPDM resists heat, oxygen, ozone, sunlight, chemicals, abrasion, and weather
- Stainless steel .75" MGHT and FGHT swivel hose ends
- Temperature Range: -40° to 200°F/93°C
- Maximum working pressure 300 psi
- Dimensions: Inside diameter .75", outside diameter 1.16"
- Lengths: 25' and 50'

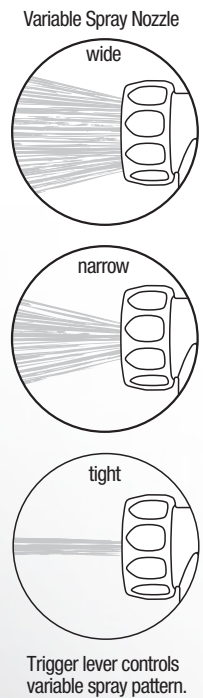

Model
H253NP1
H503NP1



Model
H253NP1B
H503NP1B



Model
H25W3NP1
H50W3NP1



Model
H25W3NP1B
H50W3NP1B

NOTE: Materials are bound in a solid form and do not present a route of exposure for a consumer. Consistent with the California Proposition 65 list of chemicals known to cause cancer or reproductive toxicity, these chemicals would need to be in an airborne, unbound particle of respirable size for them to be toxic.

Notice: Washdown Houses and associated washdown equipment are for non-potable water use only.