

SANI-LAV[®] COLUMBIA PRODUCTS


Straight Industrial Spray Nozzle Models D10 and D11



Model D11



Model D10

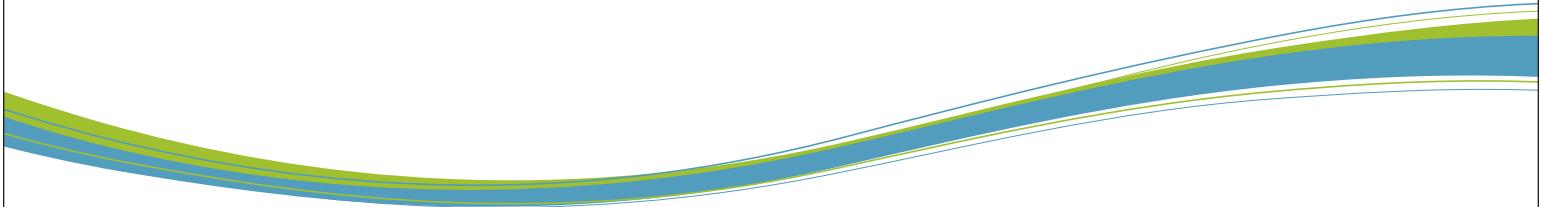

Models D10 and D11 Universal Features

Model	Color	Inlet	Material	Max PSI	Max Temp.	GPM @ 100 PSI	Weight	Includes
D10	White	3/4" GHT Female	Plastic	100	150°F/65°C	13.0	0.8 lbs.	On/Off Control Valve – N16
D11	White	3/4" GHT Female	Plastic	100	150°F/65°C	13.0	0.8 lbs.	—

Universal Features

Hardened temperature resistant plastic body with brass components. For use with hot and cold water wash-down applications. No trigger design makes for easy handling. Includes model N16 on/off valve (Model D10). For safety we recommend using with cold water only.


Quick Specs

Max Temperature	150°F/65°C
Max Pressure	100 psi
Inlet	3/4" GHT Female
Flow Rate	13.0 GPM at 100 psi
Tip	Tight Spray Pattern
Body Material	Plastic
Hose Adapter	On/Off 3/4" Male GHT x 3/4" FGHT
Weight	0.8 lbs.
Dimensions	D10: L 5 3/8" x W 1 5/8"
Dimensions	D11: L 7 3/8" x W 1 5/8"

*Recommend for cold water use only.

Water Flow Rates

PSI	Standard GPM
20	5.6
30	7.2
40	8.2
50	9.1
60	10.2
70	10.9
80	11.6
90	12.3
100	13.0

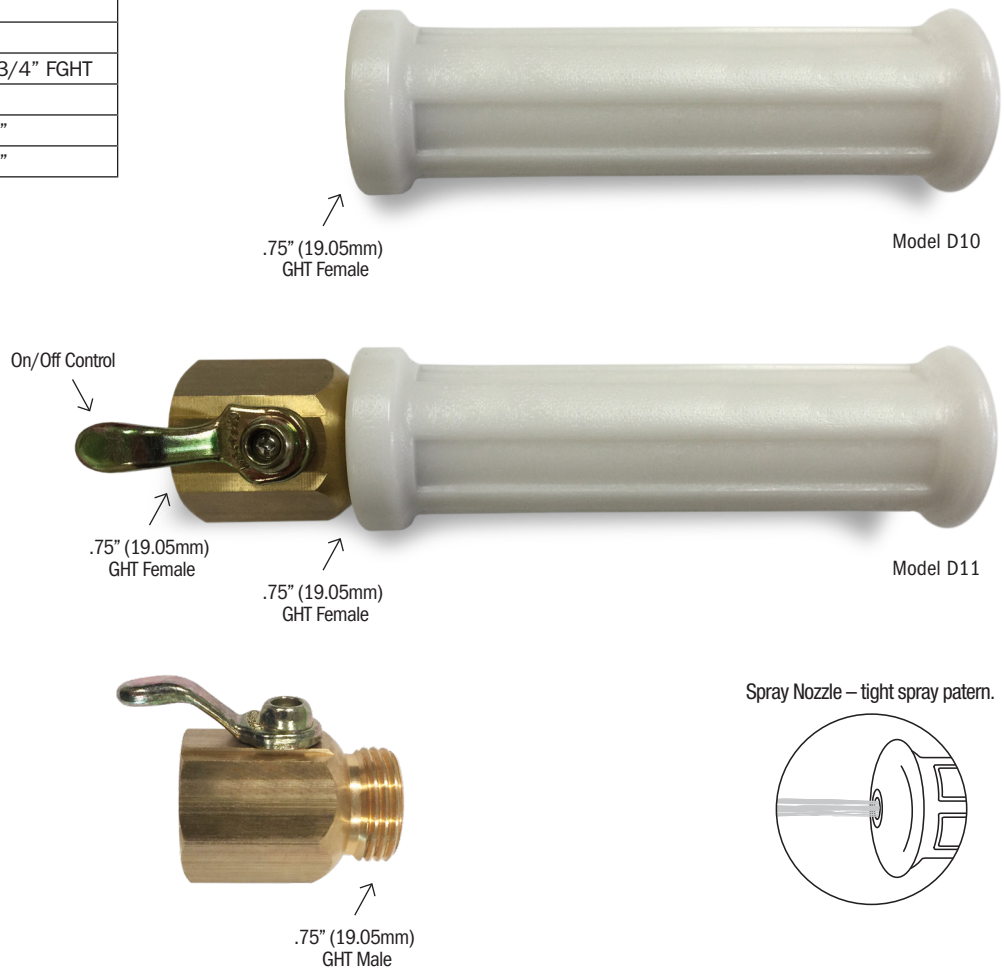

Notice for California Consumers

WARNING: This product can expose you to chemicals including Chromium (hexavalent compounds), Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

NOTE: Lead content originates from Brass components in valves and faucets and is certified under NSF/ANSI 372 as containing less than 0.25% lead in wetted surfaces.